



Features

- Class: Extreme, power density up to **3000 W/dm³** (39 W/in³)
- Designed for convectional cooling
- **Low profile: 24 mm design** with terminal blocks
- Case operating temperature ranges: -40°C...+85°C, -50°C...+85°C
- Output current up to 125 A, output power up to 2 500 W
- Input voltage ranges: 100...242 VAC, 176...242 VAC (**on request possible 90...265 VAC**)
- Parallel operation
- Power factor correction
- Additional output for fan
- Over current, short circuit, overvoltage and thermal protection
- Remote on/off by applying a voltage or a "dry contact"
- Output voltage adjustment
- Remote feedback
- Max capacitance – not limited
- Metal case

Description

AC/DC power supplies (modules) **JETA2500-LP** belong to the new series of ultra Low Profile units, designed for applications in the most compact configurations with vast number of harsh environmental conditions. The unit provides power up to 2 500 W with footprint of 250x140 mm and height 24 mm!

The units can be switched on/off by a signal, have a full protection complex against over current, short circuit and overheating; they also can be connected in parallel or in series and provide compliance to EMC standard EN55022, class A (class B with filtration and protection modules JETAF20).

Modules are made of customized element base. They are sealed with heat-conducting potting material and could have wide operating temperature range up to -50°C...+85°C, featuring a thermal protection chip. These power supplies undergo special temperature and burn-in tests with extreme on/off modes.

Ordering information

JETA 2500 - 230W S 48 - S C N - LP

1 2 3 4 5 6 7 8 9

1+9 - «JETA-LP» Series

2 - Max output power, W

3 - Input voltages

230W – 230 VAC (100...242 VAC)

230 – 230 VAC (176...242 VAC)

Note: from 90 to 265 VAC upon request

4 - Index of output channels quantity

S – one

5 - Nominal output voltage, VDC (two signs for a channel)

6 - Index of design option

S - modification with polymer potting protection

7 - Index of outputs

C - case with terminal blocks

8 - Index of operating temperature range of the case

N -40°C ...+85°C (basic version)

P -50°C ...+85°C

Technical information

Standard models with one output

Module	Input voltage range	Output power	Output voltage / nominal output current	Typical efficiency
JETA2500-230WS15-XXX-LP	~100...242 VAC*	1875 W	15 VDC / 125 A	88%
JETA2500-230WS24-XXX-LP			24 VDC / 104.2 A	91%
JETA2500-230WS27-XXX-LP		2500 W	27 VDC / 92.6 A	91%
JETA2500-230WS48-XXX-LP			48 VDC / 52.1 A	92%
JETA2500-230S15-XXX-LP	~176...242 VAC	1875 W	15 VDC / 125 A	88%
JETA2500-230S24-XXX-LP			24 VDC / 104.2 A	91%
JETA2500-230S27-XXX-LP		2500 W	27 VDC / 92.6 A	91%
JETA2500-230S48-XXX-LP			48 VDC / 52.1 A	92%

Modules with non-standard output voltage from 15 to 60 VDC could be delivered by request.

* For input voltage 230W (wide input) maximal output power decrease at input voltage 100...176 VAC according to the derating curves.

Specifications *

Input specifications	
Input voltage range / Input voltage transient deviation (1 s) 230 W**	~ 100...242 VAC (accepted =140...342 VDC)/ ~ 100...264 VAC (accepted =140...373 VDC)
Input voltage range / Input voltage transient deviation (1 s) 230	~ 176...242 VAC (accepted =248...342 VDC)/ ~ 176...264 VAC (accepted =248...373 VDC)
Input frequency	47...440 Hz
Input current surging at start-up at 230V	130 A
Power factor	>0,96
Harmonics content of input current	EN61000-3-2, class D
Output specifications	
Output voltage adjustment using trimmer resistor ADJ	±5%
Output voltage adjustment using pin ADJ	-30%...+10%
Instability of output voltage in accordance to changing of output current from 10 to 100%	±2%
Instability of output voltage in accordance to instability of input voltage	±0,5%
Ripple and noise (peak-to-peak) (20 MHz)	<2% Uout
Overvoltage protection***	>125% Uout
Over current protection level & short circuit protection***	Iout limiting at 110-120% of Iout nom
Remote On/Off	Shuts down by applying 3...5VDC (≤5 mA) on REM outputs or shorting pins AUX & +REM
Max capacitance	not limited
Output for fan	9.5...13 VDC, I _{max} =200 mA
Service functions OGOOD	Controlling "opened-collector transistor": on if output voltage U _{out} > 0,7*U _{out.nom} ; off if output voltage U _{out} < 0,7*U _{out.nom} or module is turned off. U _{max} = 20 V, I _{max} = 15 mA
General specifications	
Case temperature (operating N)	-40°C ...+85°C*****
Case temperature (operating P)	-50°C ...+85°C*****
Case temperature (storage)	-50°C ...+85°C
Level of operation of thermal protection (temperature of case)	82°C ...+95°C, auto restore
Output power derating (natural convection)	See diagram (dashed, dash-dotted curves)
Output power with heatsink with thermal resistnace R _{ha} =0,08°C/W, difference between ambient and module case temperature would be 15°C	See diagram (solid curve)
High humidity	95% @ 35 °C
Conversion frequency, fixed	125 - 150 kHz
Insulation voltage input/case	1500 VAC
Insulation voltage input/output; input/REM, AUX, OGOOD	3000 VAC
Insulation voltage output, REM, AUX, OGOOD/case; output/REM, AUX, OGOOD; REM, AUX/OGOOD	500 VAC
Isolation resistance @ 500 VDC	20 MOhm
EMC standards	EN55022, class A (class B with filter JETAF20)
Safety standard	IEC/EN60950
Thermal resistance case — environment without heat sink	0,8 °C/W
Typical MTBF (T _{case} = 50°C; P _{out} = 0,7 P _{out max})	30 000 hrs
Cooling method	Free air convection or forced air cooling
Weight (max)	1900 g

* All specifications are valid for normal climatic conditions, U_{in.nom.}, I_{out.nom.}, unless otherwise stated.


** For input voltage 230W (wide input) maximal output power decrease at input voltage 100...176 VAC according to the derating curves.

*** Parameters are stated for information purposes and could not be applied to long term work, exceeding maximum output current, at work outside of operating temperature range.

**** For other output voltages the maximum output capacity is calculated from the fact that $\frac{C_{max} \times U_{out}^2}{2}$ is a constant.

***** Turn-on delay of power supply at subzero temperatures can reach up to 5s at -40°C, 15...20s at -50°C.

Output power vs ambient temperature for input voltages ~176...242 VAC

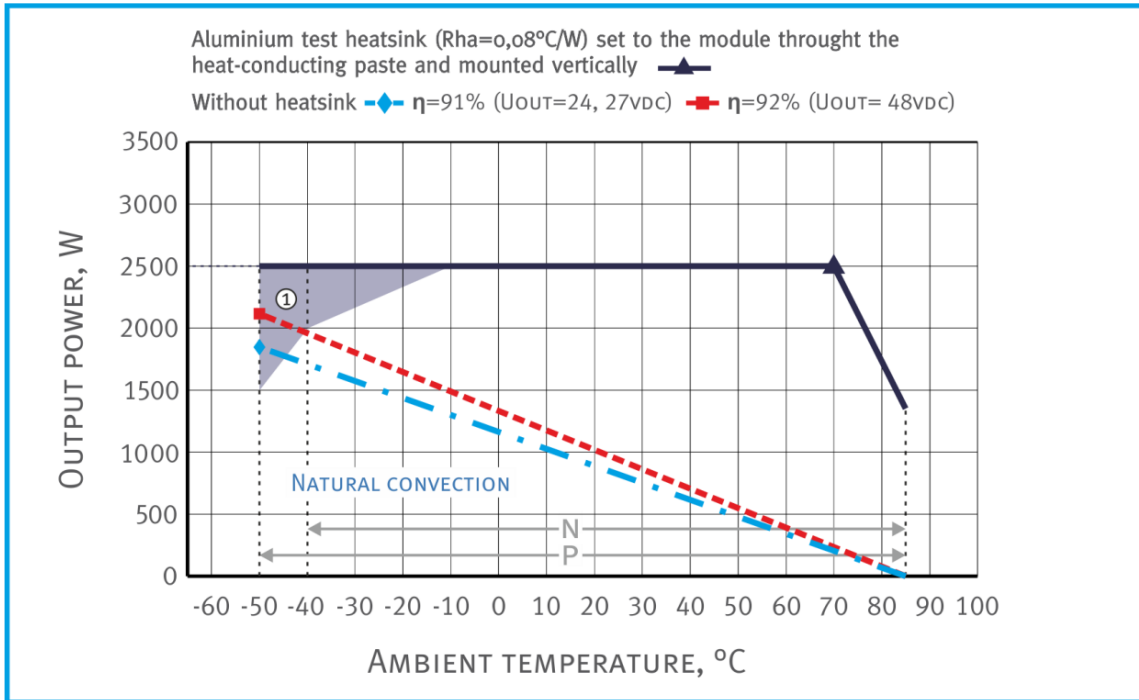


Dropping parts of the dashed and dash-dotted curves are in accordance with the **maximum temperature of the case** (for modules with index «N», «P» equal to $+85^{\circ}\text{C}$). Output power must not exceed the values which are limited by corresponding curve for a given ambient temperature.

Modules can be used without a heat sink only when attached to a heat conductive plate with thermal paste. The length and width of the plate should not be less than those of the case, and its thickness must not be less than 4 mm.

Points \blacktriangle , \blacklozenge and \blacksquare represent simultaneously several extreme worst-case conditions, such as the combination of maximum case temperature and maximum output power. Continuous module operation at these points should be avoided.

Output power vs input voltages

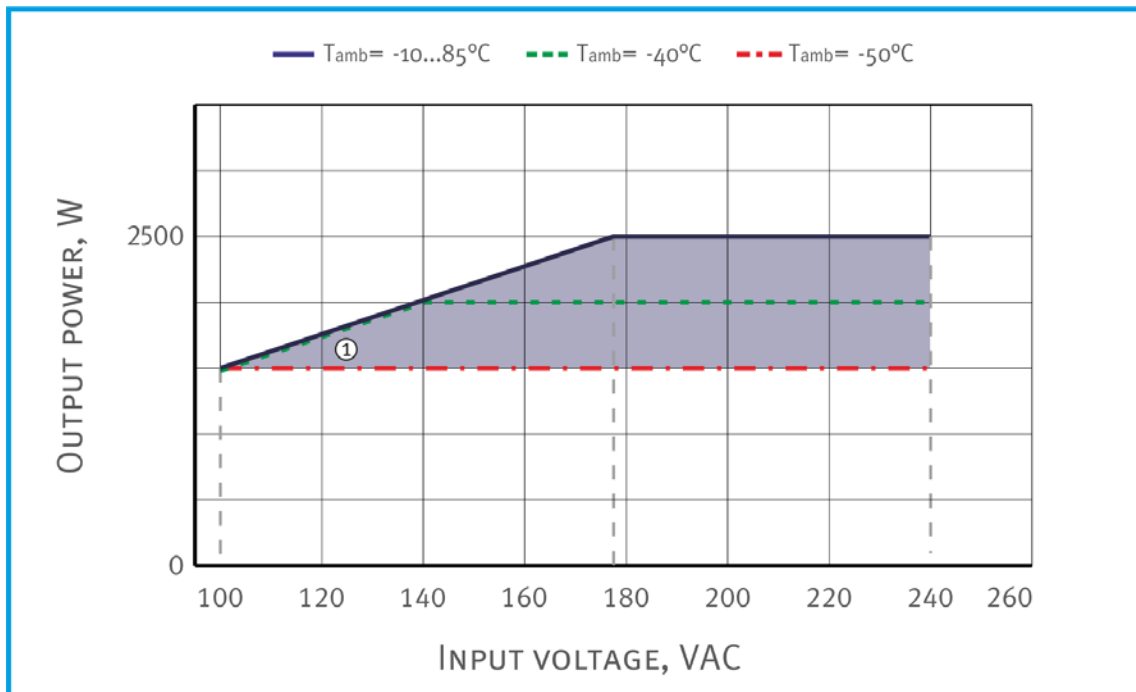

① - For ambient temperature $-50^{\circ}\text{C}\dots-10^{\circ}\text{C}$ in gray areas of diagrams some specification parameters may not be met.

Pin out (models with the terminal blocks)

X1.1	X1.2	X1.3	X2.1	X2.2	X3.1	X3.2	X3.3	X3.4	X3.5	X3.6	X3.7	X3.8	X3.9	X3.10
GND	N	L	+OUT	-OUT	+OGOOD	-OGOOD	not use	not use	ADJ	PARAL	+FAN	-FAN	-RS	-OUT


X3.11	X3.12	X3.13	X3.14	X3.15	X3.16	X3.17	X3.18
+RS	+OUT	not use	not use	not use	AUX	-REM	+REM

X1.1, X1.2, X1.3	Screw size: 6-32x1/4 L Recommended Torque: 0,5 Nm Recommended: Use ring terminal, for example MOLEX 19323-0007. MOLEX 19324-0007.
X2.1, X2.2	Screw size: M5 Recommended torque: 2Nm Recommended: Use ring terminal, for example Würth Electronics Inc. 5580510 or 5580516.
X3	MOLEX, C-GRID III MALE – SDA-90130-1118. FEMALE – SD-90142-0018 (18 pin) USE WITH "GRIMP TERMINAL" SD – 90119-0109 or other. USE "HAND CRIMP TOOL" for C-GRID III female Crimp Terminals for example 63825-8100 or other depending on the CRIMP TERMINALS.

The use of a central socket for attaching the module to the heatsink is required, whereas the fastening screw must enter the module body to a depth of no more than 7 mm.

Violation of these requirements may result in damage to the module, its failure and entails waiving of the warranty.

Single output model with terminal blocks (IV A case size)

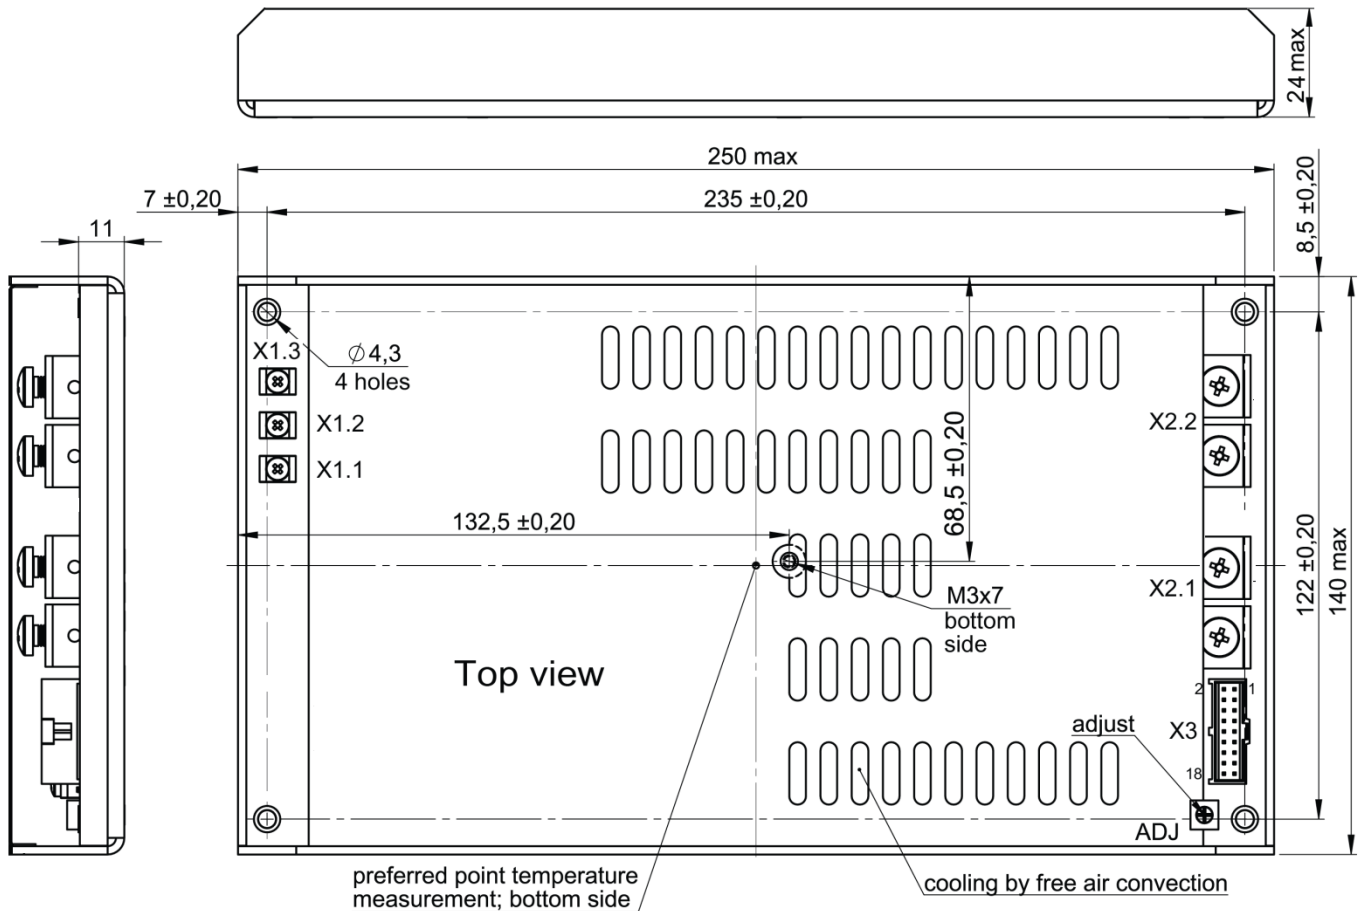

Certificates

Certificate ISO 9001*
CE conformity declaration

* Management system and R&D of Alexander Electric is ISO certified

Note

Please note that information given in this document is not complete. More detailed information (additional requirements, typical connection schemes, operation manuals, etc.) may be provided to you upon request.

Contact information

<http://www.goncharov-jet.com>, e-mail: aeps@aeps-group.cz, phone/fax: +420 281 001 341

According to company's policy in view of constant improvements of the production design the manufacturer reserves the right to itself change the contents of promotional materials without prior notification.

Special requirements